


Quick User Guide: CO Alarms

CO-9X


TEST 1 - Sounder and electronics

- Once a week, press test/reset button and release
- The unit will emit a loud noise and the LEDs will flash

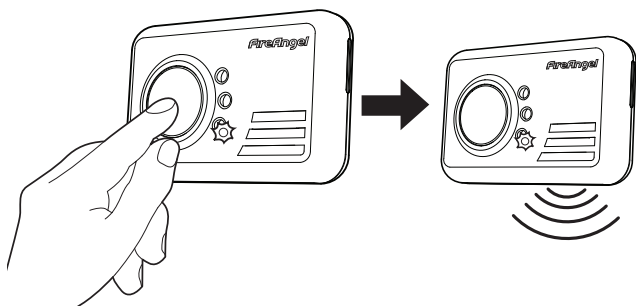


TEST 2 - Sensor

- If alarm is wall mounted, unhook from the fixing screws
- Press test/reset button, hold down until the Fault LED illuminates yellow. Detector is now in sensor test mode
- Light an incense stick. Turn the detector on its side (see below)
- Hold the incense stick 6 inches (15 cm) below the alarm so the smoke enters the side of the alarm
- Alarm will sound and Fault LED will illuminate again briefly when CO reaches a certain level. Test ends
- If CO doesn't reach required level, test stops after 4 minutes.

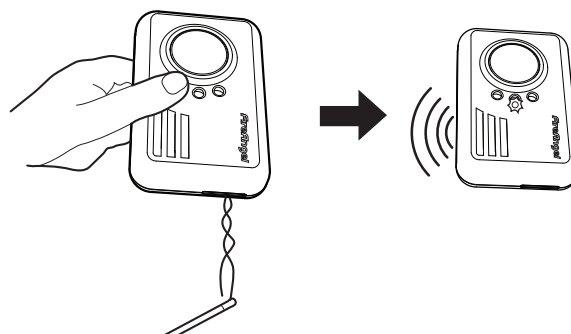

TO MAINTAIN

- Perform TEST 1 once a week by pressing the test/reset button briefly
- Perform TEST 2 once a month.




Clean the alarm with a vacuum cleaner and soft brush attachment once a month

DO NOT

Clean using solvents or cleaners

Paint the alarm



Do not use products that emit strong fumes near the alarm!

IN THE EVENT OF AN ALARM

- Turn off appliances where possible
- Evacuate property leaving windows and doors open to ventilate
- **Call the National Grid (Transco) on free phone 0800 111 999**
- Do not use the appliance again until it has been checked by a qualified engineer.



This quick user guide is designed to be a reminder only. It **MUST** be used in conjunction with the user manual accompanying your product.

For advice on FireAngel products call the FireAngel Technical Support Line **0800 141 2561**